



**Features:**

- Loop Powered  
(no separate 24VDC required)
- LED indication

**Description:**

To meet Australian Standard installation requirements, FireSense offers an isolator module (model ISO-X) for use with 2800 series analogue addressable fire alarm systems.

Isolator bases must be strategically positioned throughout the addressable loop cabling as per Standards requirements. The isolator base will disconnect the section of the loop between short circuit isolators in the event of a short circuit to prevent the entire loop from being disabled.


Up to 25 detectors/modules can be installed between isolators.

**Specifications:**

<b>Nominal Operating Voltage:</b>	15 to 32 VDC
<b>Temperature Range:</b>	0°C to 49°C.
<b>Humidity Range:</b>	10% to 93% non-condensing
<b>Dimensions:</b>	115mmH x 100mmW x 31mmD
<b>Mounting Box: (SMB500)</b>	125mmH x 125mmW x 50mmD

**Connection Information:**

- Terminal 1: Loop In (-)
- Terminal 2: Loop In (+)
- Terminal 3: Loop Out (-)
- Terminal 4: Loop Out (+)

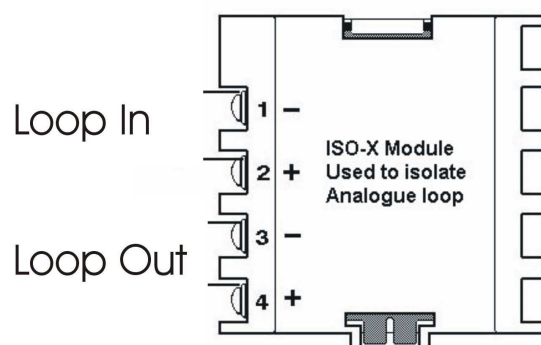

**Approvals:**

SSL Approved	
<b>ActivFire Listing No.</b>	afp-1801

Distributors For:



Unit 6  
16 Lexington Drive  
Bella Vista NSW 2153  
Australia

PO Box 7026  
Baulkham Hills BC  
NSW 2153  
Australia

tel 02 8850 2888  
fax 02 8850 2999  
www.firesense.com.au