



Features:

- Loop Powered (no separate 24VDC required)
- LED indication
- FlashScan – 159 per loop
- Rotary Wheel for ease of addressing

Description:

The SSF-FMM1 module is a full size addressable input module capable of monitoring normally open contact fire alarm and supervisory devices; or either normally open or normally closed security devices. The module has a single panel-controlled LED.


The SSF-FMM1 Monitor Module is intended for use in intelligent, two-wire systems, where the individual address of each module is selected using the built-in rotary switches.

Each SSF-FMM1 uses one of 159 available module addresses on a loop.

Specifications:

Nominal operating voltage:	15 to 32 VDC
Maximum current draw:	5.1 mA (LED on)
Average operating current:	400 μ A (LED flashing)
EOL resistance:	47K ohms
Temperature range:	0°C to 49°C
Humidity range:	10% to 93% non-condensing
Dimensions:	115mm H x 100mm W x 31mm D
Mounting Box (SMB500):	125mm H x 125mm W x 50mm D

Connection Information:

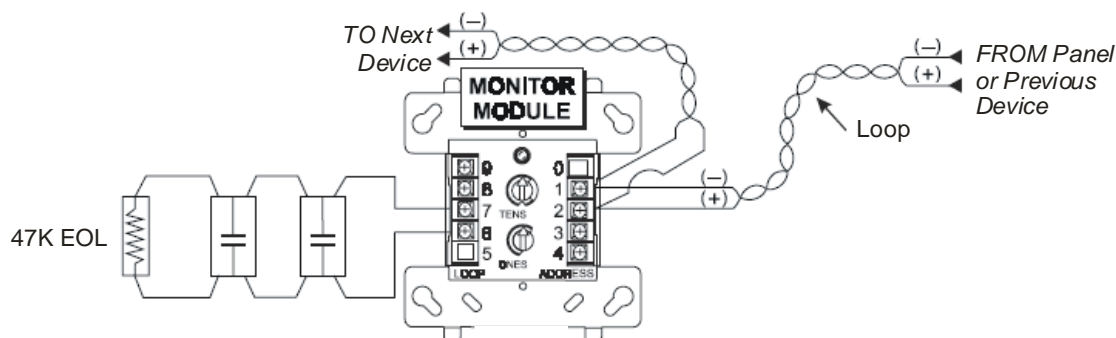

Approvals:

SSL Approved	
ActivFire Listing No.	afp-1801

Distributors For:



Unit 6
16 Lexington Drive
Bella Vista NSW 2153
Australia

PO Box 7026
Baulkham Hills BC
NSW 2153
Australia

tel 02 8850 2888
fax 02 8850 2999
www.firesense.com.au