



**Features:**

- Loop Powered (no separate 24VDC required)
- LED indication
- FlashScan - 159 per loop
- 2 x change-over contacts
- Rotary wheel for ease of addressing

**Description:**

The SSF-FRM1 Addressable Relay Module provides 1 x logical output with 2 x change-over clean-contact outputs for activating a variety of auxiliary devices, such as fans, dampers, control equipment, etc.


Addressability allows the contact to be activated, either manually or through panel programming, on a select basis. The SSF-FRM1 is powered from the 2 wire addressable loop and is suitable for switching external voltages of up to 32VDC.

Each SSF-FRM1 uses one of 159 available module addresses on a loop.

**Specifications:**

<b>Nominal operating voltage:</b>	15 to 32 VDC
<b>Maximum Loop Current:</b>	5.1 mA (LED on)
<b>Contact Rating:</b>	1A @ 32VDC
<b>Temperature range:</b>	0°C to 49°C
<b>Humidity range:</b>	10% to 93% non-condensing
<b>Dimensions:</b>	115mmH 100mmW 31mmD
<b>Mounting Box: (SMB500)</b>	125mmH 125mmW 50mm D

**Connection Information:**

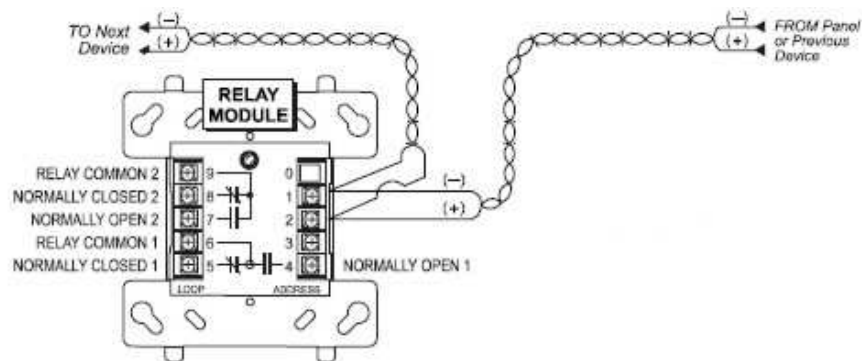

**Approvals:**

SSL Approved	
<b>ActivFire Listing No.</b>	afp-1801

Distributors For:



Unit 6  
16 Lexington Drive  
Bella Vista NSW 2153  
Australia

PO Box 7026  
Baulkham Hills BC  
NSW 2153  
Australia

tel 02 8850 2888  
fax 02 8850 2999  
www.firesense.com.au