



Features:

- LED indication
- FlashScan – 159 per loop
- Rotary Wheel for ease of addressing
- Supports compatible two-wire smoke detectors
- Supervises connection of external power source

Description:

The SSF-FZM1 Zone Module is used to monitor a zone of two-wire smoke detectors. The SSF-FZM-1 will operate in both CLIP and FlashScan modes.


The SSF-FZM1 transmits the status (normal, open, or alarm) of one full zone of conventional detectors back to the control panel. All two-wire detectors being monitored must be compatible with the module.

The SSF-FZM1 has a panel-controlled LED indicator and can be used to replace SSC-MMX2 modules in existing systems.

Specifications:

Normal Operating Voltage:	15-32 VDC
Maximum Current Draw:	5.1 mA (LED on)
Average Operating Current:	270 μ A (LED flashing)
EOL Resistance:	3K9 ohms
Temperature:	0°C to 49°C
Humidity:	10% to 93% Non-condensing
Dimensions:	125mm W x 125mm H x 55mm D

Connection Information:

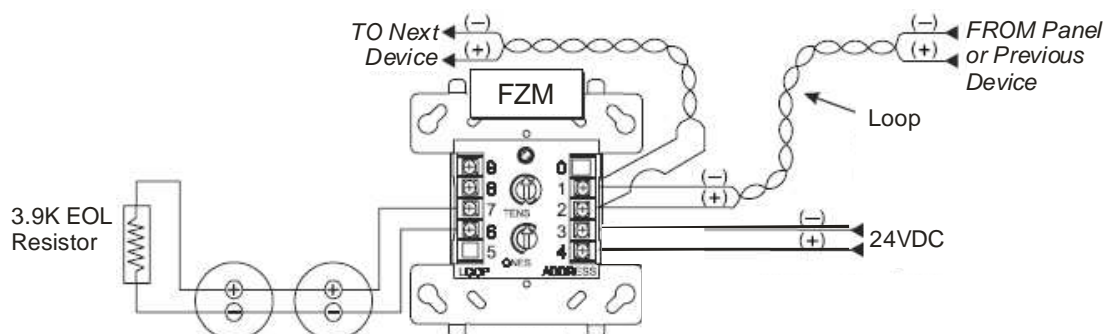

Approvals:

SSL Approved	
ActivFire Listing No.	afp-1801

Distributors For:



Unit 6
16 Lexington Drive
Bella Vista NSW 2153
Australia

PO Box 7026
Baulkham Hills BC
NSW 2153
Australia

tel 02 8850 2888
fax 02 8850 2999
www.firesense.com.au