

**50 Watt Stand Alone OWS Amplifier**



**Features:**

- Provides audible tones in accordance with AS2220
- Current status clearly displayed on LED indicator
- Self contained in key locked 003 enclosure

**Description:**

The FireSense stand alone 50W OWS amplifier is ideal for use in existing fire alarm installations that require the addition of an OWS amplifier to meet code requirements. The stand alone 50W OWS unit has its own 240V power supply, and battery charging capabilities.

An alarm signal from the existing fire alarm panel will trigger the system when in auto mode. Manual control is achieved by a 4 position rotary switch on the front of the panel which can select manual evacuation or Public address.


**Specifications:**

<b>Operational Voltage:</b>	27VDC + 10%
<b>Output Power:</b>	50 Watts
<b>Speaker Line:</b>	100V
<b>Power Consumption:</b>	Up to 5.0 Amps peak @24VDC
<b>Dimensions:</b>	390W x 440H X 160D

The OWS module has 4 modes of operation:

1. Off
2. Auto
3. Alert
4. Evacuate

Control is achieved by the use of a rotary switch located on the front of the fire panel, with the current status displayed on LED indicators adjacent (as below).

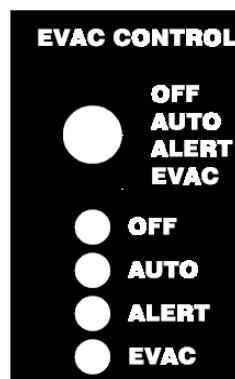

Distributors For:



Unit 6  
16 Lexington Drive  
Bella Vista NSW 2153  
Australia

PO Box 7026  
Baulkham Hills BC  
NSW 2153  
Australia

tel 02 8850 2888  
fax 02 8850 2999  
www.firesense.com.au