

Features:

- Provides audible tones in accordance with AS2220
- Current status clearly displayed on LED indicator
- PA Microphone
- Fits into the 2600 cabinet.

Description:

The FireSense OWS-50W-SIDE, 50 Watt Building Occupant Warning System is designed for use in fire alarm installations that require the addition of an OWS amplifier to meet code requirements.

The OWS-50W-SIDE simply fits into the side of the 2600 panel and has its own internal 240V power supply, and uses the fire panel's batteries in the event of a power failure.

The 100v Speaker line is monitored for open and short circuits as standard and can be expanded to monitor multiple speaker feeds from one amplifier with the option of fitting an OWS-SDM-4.


Specifications:

Operational Voltage:	22-28VDC
Output Power:	50 Watts
Speaker Line:	100V
Power Consumption:	Up to 5.0 Amp Peak (24VDC)
EOL Resistor:	47K

Accessories Available:

OWS-SDM-4 4 Way Speaker Line Monitoring Card (4 feeds)
MIC-DESK OWS Desktop Microphone with pre amp fitted

Connection Information:

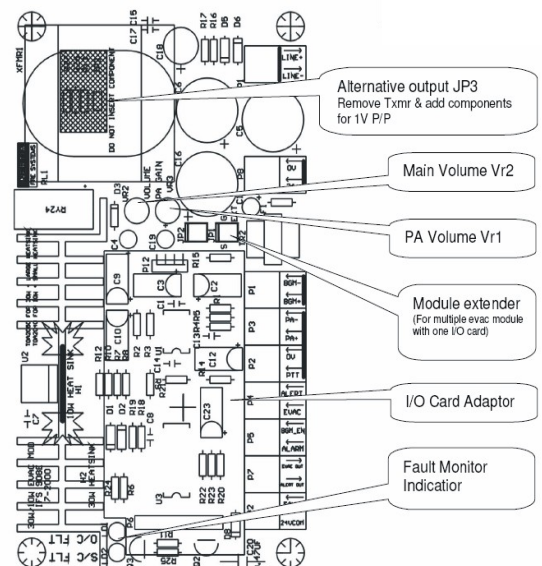

Distributors For:



Unit 6
 16 Lexington Drive
 Bella Vista NSW 2153
 Australia

PO Box 7026
 Baulkham Hills BC
 NSW 2153
 Australia

tel 02 8850 2888
 fax 02 8850 2999
 www.firesense.com.au

