

Features:

- SSL approved
- Low profile design
- Optional tamper proof feature
- Two-wire loop connection
- Communication over +ve and -ve connections
- Remote indicator terminals



Description:


Plug-in Detector Base for use with AFP-2800 analog/addressable fire alarm systems.

Suitable for both Clip and FlashScan detectors.

Specifications:

Diameter:	102mm
Mounting:	50mm, 60mm and 70mm centres
Voltage Range:	15 - 32 VDC
Standby Current (Nominal):	150 μ A at 24 VDC
Power-up Surge at Maximum Rated Voltage:	1.5 mA Sec
LED Current (Nominal):	6mA at 24 VDC

Connection Information:

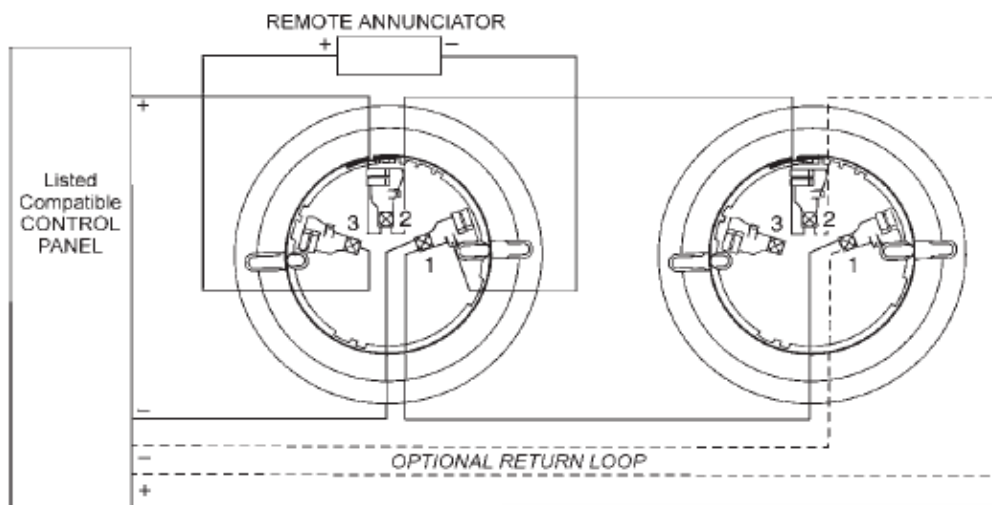

Distributors For:



Unit 6
16 Lexington Drive
Bella Vista NSW 2153
Australia

PO Box 7026
Baulkham Hills BC
NSW 2153
Australia

tel 02 8850 2888
fax 02 8850 2999
www.firesense.com.au