


Features:

- Built-in type identification
- Powered directly from loop, no additional power required.
- High noise (EMF/RFI) immunity

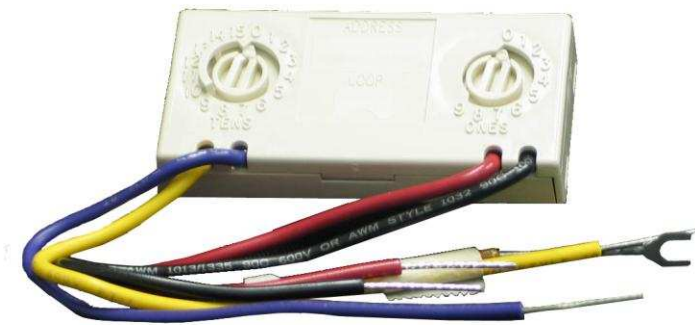

Description:


The SSF-FMM101 Miniature Monitor Module is a 2 wire monitored input device for use with 2800 panels operating in FLASHSCAN mode (159 detectors and 159 modules per loop)

It is capable of monitoring normally open contact fire alarm and supervisory devices; or either normally open or normally closed security devices.

Specifications:

Nominal operating voltage:	15 to 32 VDC
EOL resistance:	47K ohms
Temperature range:	0°C to 49°C
Humidity range:	10% to 93% non-condensing
Dimensions:	33mm H x 70mm W x 12mm D

Connection Information:

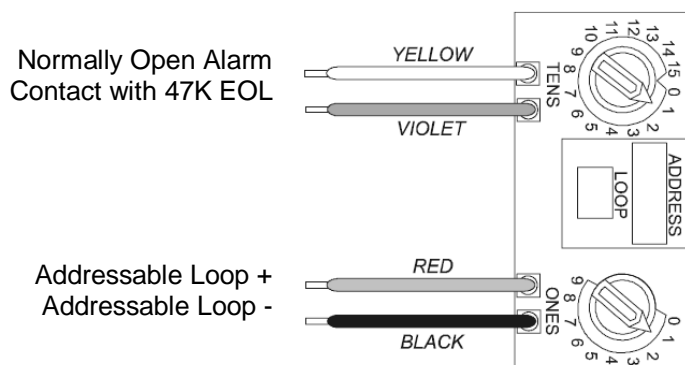

Approvals:

SSL Approved	
ActivFire Listing No.	afp-1801

Distributors For:



Unit 6
16 Lexington Drive
Bella Vista NSW 2153
Australia

PO Box 7026
Baulkham Hills BC
NSW 2153
Australia

tel 02 8850 2888
fax 02 8850 2999
www.firesense.com.au